


Abstract

We analyze in detail the seismic vibrations generated by trains and measured at distance from the track with high sensitivity broadband sensors. We show and analyze various train vibration signals obtained from a set of seismic broadband stations temporarily installed for the AlpArray project.


The geometrical restrictions of the network resulted in a number of instruments deployed in the vicinity of railway lines. On seismic stations within 1.5 km of a railway we observe characteristic seismic signals which we can relate to the passage of trains. All train signals share a characteristic feature of sharp equidistant spectral lines in the entire 2-40 Hz frequency range. For a site located 300 m from a busy track we study the train records in detail. Here, frequency spacing is between 1 and 2 Hz and relates to train speed. From the spectrograms of individual trains we can identify acceleration and deceleration phases which match well with the expected driving profile for different types of trains.

We discuss possible mechanisms which could be responsible for the strikingly equidistant spectral lines. We search for Doppler effects and compare the observations with theoretically expected values. Based on a cepstrum analysis we finally suggest quasi-static axle load by consecutive bogies as the dominant mechanism behind the 1-2 Hz line spacing. The striking feature of the equidistant spectral lines within the train vibrations renders them quite outstanding seismic sources which may have potential for seismic imaging.


Spectrogram examples

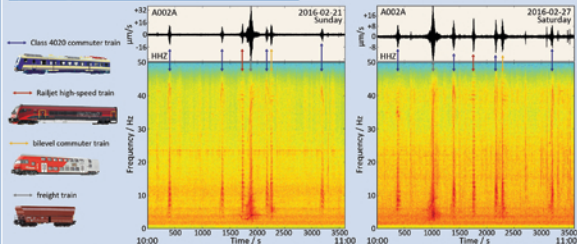

Doppler effect

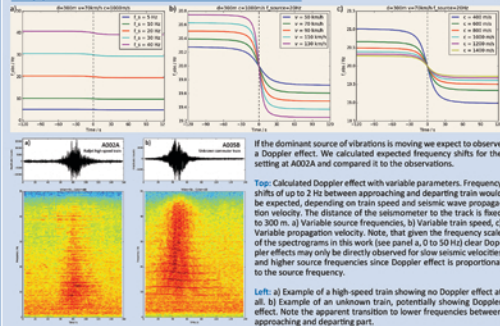


Workflow

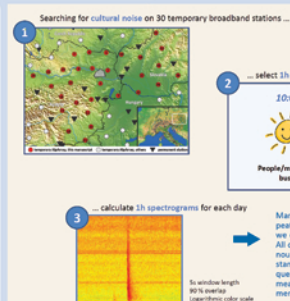


Map and geometrical setting



Individual trains in detail

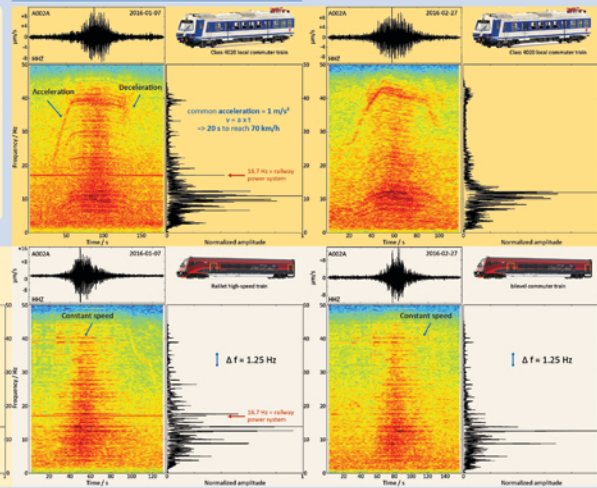

Cepstrum analysis

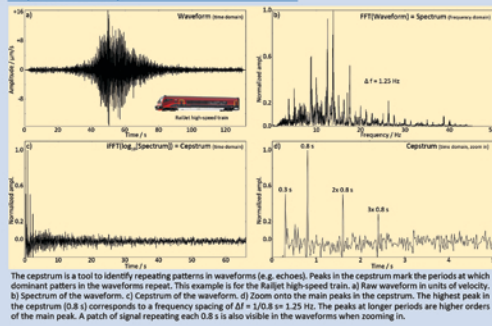

Possible mechanisms

